

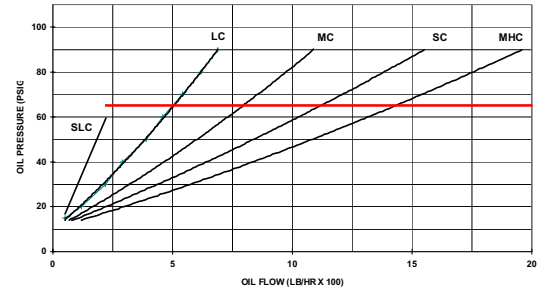


# Type "T" Oil Gun

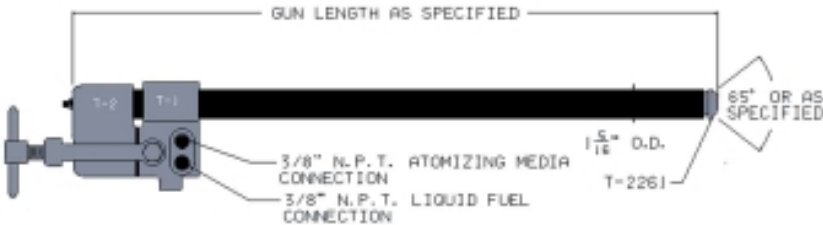

- Heat input range 2.1 to 24 mmBtu/hr
- Used as warm up guns in large oil ignitors, or to burn waste streams
- Steam or air atomized
- Designed for fuels with a viscosity of 200 ssu or less. Use orifice bushing P/N ob-70 for fuels with a viscosity of 35 to 50 ssu
- Optional clean out valve assembly P/N B4
- Requires atomizing differential pressure control. Approximately 15 psig differential for #2 Oil and 18 Psig differential for #6 oil
- Atomizer Assembly:

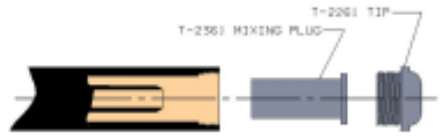

(Internal Mix)